

Universal Device Interface



Features

- High resolution and speed in a compact and cost-effective package.
- Permits simple interfacing of existing devices to a fast fiber-optic communication loop.
- Can be mounted on or close to the device being controlled
- Up to sixteen devices can be connected on a single fiber-optic loop
- Very low transition transient on analog output DACs, for compatibility with wideband power supplies.

Applications

- Remote control of power supplies and similar devices over fiber-optic.
- Waveform generation for scanned or swept devices.
- Control of devices across high voltage barriers.
- Connection of multiple devices to a PC host. Each device independently addressable.
- Fully automated systems operating in electrically noisy environments.
- Addition of high-performance remote control to existing systems.

Specifications

Analog output	Number of independent outputs	2
	Output voltage range	-10 V to + 10 V
	Output current compliance	+/- 5 mA
	Resolution over full voltage span.	16 bit
	Linearity max deviation over span	<0.1%
	Maximum update rate for arbitrary waveforms	>10 kHz under direct A500 host control
Analog input	Number of independent inputs	2
	Configuration	Differential
	Input voltage range	-10 V to +10 V (software configurable to +/- 5V, 0 to +5V, or 0 to +10V)
	Input impedance	10 kohm
	Common mode rejection	80 dB



Specifications (continued)

Digital output	Number of independent outputs	4
	Voltage level	TTL
	Maximum current drive capability	24 mA
	Output impedance	100 ohm
	Minimum output pulse length	15 nsec
Digital input	Number of independent inputs	4
	Voltage level	TTL
	Configuration	Active low, internal 10 kohm pul- lup to +5 V
	Input impedance	10 kohm

Power input	+24V (+/- 2V) DC, 500mA maximum
Controls	16 position rotary switch for address selection
Displays	Status LEDs (power, processor status, comms status)
Case material	Stainless steel sheet.
Weight	0.15kg (0.33 lb)
Operating environment	10 to 35C, < 80% humidity, non-condensing, vibration < 2g all axes, 1 to 1000Hz
Storage environment	0 to 50C, < 80% humidity, non-condensing, vibration < 2g all axes, 1 to 1000Hz

Interfacing and control

Interfaces	Fiber-optic loop, 9600 to 10 Mbit/sec serial, 8 or 9 bit asynchronous bi- nary.
Data rate	Typical read/write rate \geq 1 kHz, depending upon loop configuration. Rate to A500 host memory (special applications) \geq 10kHz.
	Fibre-optic loop to host system interfacing available using loop control- lers: A100 (RS-232), A200 (USB), A300 (Ethernet), A500 (Real-time control- ler)
Host computer	Diagnostic host program provided for PC. Embedded software DLLs available for Microsoft® .NET, Labview and C++.



Connectors

Fiber optics	Two 1mm Avago HFBR ST bayonet			
Power in	2.1mm threaded jack. Mates with Switchcraft S761K or equivalent.			
Signal	25 way DSub female			
	1	PSU 0V in	14	+24V DC in
	2	Shield (M10 case)	15	Analog ground
	3	Analog In 1 +	16	Analog In 1 -
	4	Digital out 1	17	Digital out 2
	5	Analog In 2 +	18	Analog In 2 -
	6	Analog ground	19	Analog out 1
	7	Analog ground	20	Analog out 2
	8	Analog ground	21	+5V digital out
	9	Digital ground	22	Digital out 3
	10	Digital out 4	23	Digital ground
	11	Digital In 4	24	Digital In 3
	12	Digital In 2	25	Digital In 1
	13	Digital ground		




Ordering information

M10 M10 device with two voltage analog outputs, two analog inputs, four digital inputs and four digital outputs. Including PTCDiagnostic host software

M10-C M10 device with one 0-20 mA current output, one voltage analog output, two analog inputs, four digital inputs and four digital outputs. Including PTCDiagnostic host software

See separate data sheet.



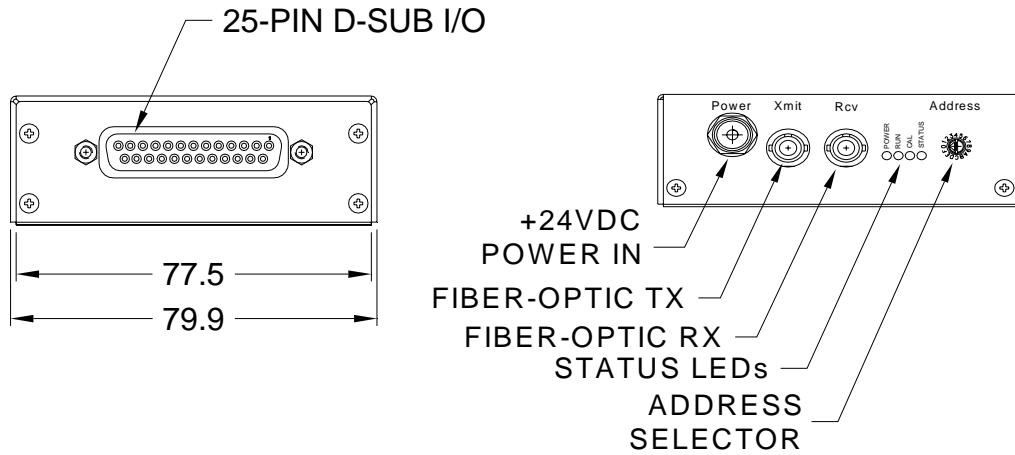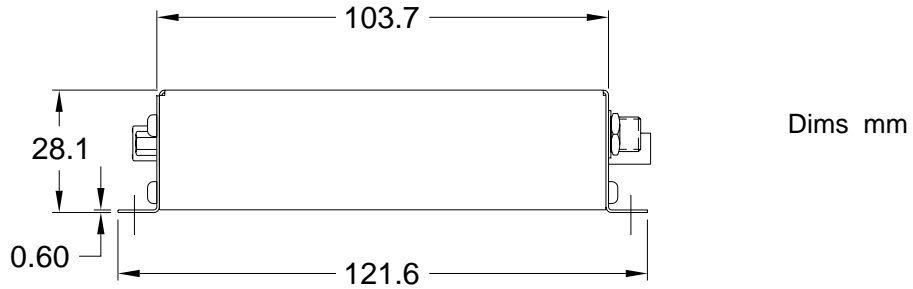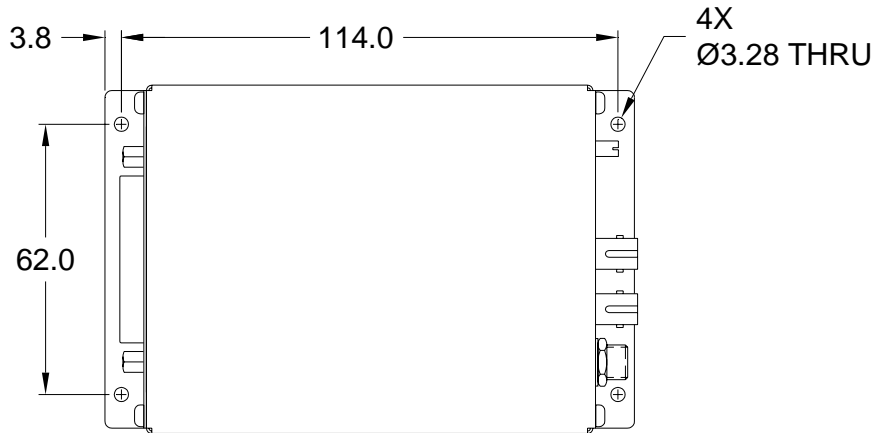

Pyramid Technical Consultants, Inc.,
 1050 Waltham Street Suite 200
 Lexington MA 02421 USA
 Tel: +1 781 402 1700 (USA),
 +44 1273 493590 (UK)
 Email: support@ptcusa.com

www.ptcusa.com


The information herein is believed accurate at time of publication, but no specific warranty is given regarding its use. All specifications are subject to change. Trademarks and copyright acknowledged.

M10_DS_080107




Recommended Connection Arrangements


Analog input : differential source

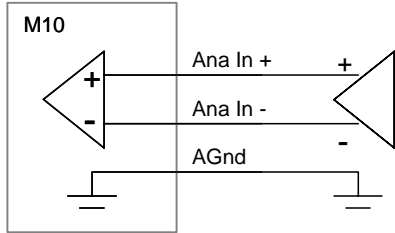


Analog input : single-ended source

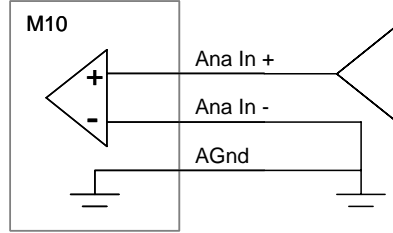


Analog output : differential destination

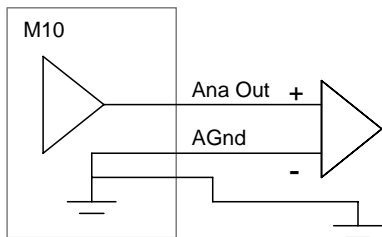


Analog output : single-ended destination

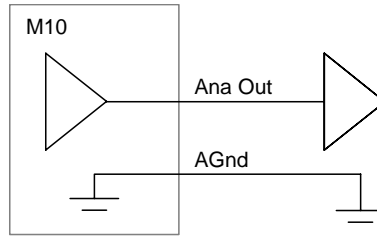


Digital input : TTL input

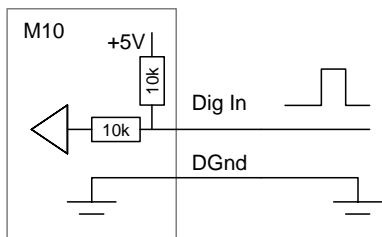

Digital input : volts-free contact

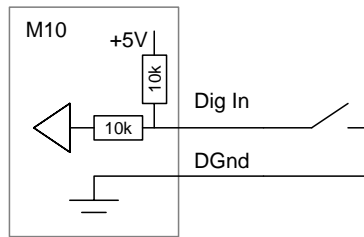

Digital output : TTL load

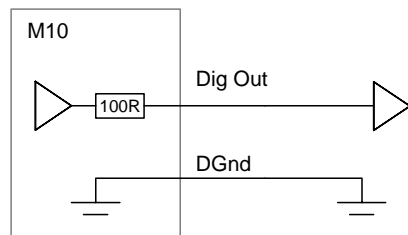

Digital output : optoisolator

